WHEN CLEAN UP IS NEEDED.....

END DUMP TRAILERS

5 Year Structural Warranty
Wide Trunion base & drop fram for added stability
Proprietary design for walls and connection points
High Dump Angle
Heavy Duty wall design with light weight steel body



For over 50 years, Andrews Industrial Machinery has been devoted to delivering top-quality products backed by expertise. Add our unwavering customer support, and it's no question who you should rely on for your next project.


WE HAVE UNITS IN STOCK TO HELP





-A ING



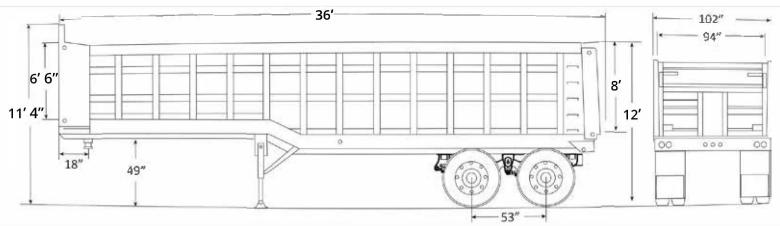

Weight: Appx. 24,900 ± lbs Overall Height: 12'

AIM 75 Yard Dump Trailer Specs

Chassis

King Pin: Fixed King Pin setting: 18" King Pin Height: 49" Main Beam: 16" I-Beam Main Beam Centers: 36" Neck Beam: 10" I-Beam Landing Gear: HD Dual 2 Speed

Tub/Frame

Longitudinals: Triple 2 1/2" x 2 1/2" x ¼" Angle Iron Floor sills: 4" Channel 12" Centerlines Side Walls: Grade 50 3/16" Side Walls Top Rail: 2" x 2" x ¼" Angle Iron Floor: Grade 50 ¼" Steel Floor Debris Guide Angle on Floor: Quad 2" x 2" x ¼" Angle Iron

Rear Gate

Rear Gate: Heavy Duty Horizonal Swing Gate Locking Mechanism: Manual Locking with safety latch Gate Operation. Manual

Electrical

Lights: LED Connector: 7-way ASE Connection Accessories: 2 Pin 24 volt plug for Tarp System

Axles, Suspension, Running Gear

Tires: 255/70R 22.5 Super Cargo Rims: 22 ½" x 8 ¼" 10 Hole White # of Axles: 2 Axle spacing: 53" Axle Capacity: 25,000 lbs each Total 50K lbs Brakes: 16 ½" x 7 ABS: Haldex ABS tandem kit 2S/1M AQ960802 Axle: 77.5" track, 25K, 24-1/8" cam, TN-spindle, 10-stud hub piloted, cast drum, 3030 spring brake, auto slack, oil bath Axle 1: PQ772A22ABS ABS Axle 2: PQ772A22 NON-ABS Suspension: 50,000 Lb. Single Point Suspension

Hydraulics:

Wet Line Wing Nut Connection Cylinder: 85-4511-235 Telescopic Cylinder with 234" Stroke

Other

Automatic Tarping System with Cab Operation Marine Grade Epoxy Paint Mud Flap Reflective Tape

Options Mounting stud on dump bed for your company Logo

www.westerntruck.com

(801)-466-8764